



INFORMATION OUTDOOR PANEL

AV-02 IDE

AVAILABLE COMMUNICATION ANYWHERE The AV02IDE is an IP65 rated outdoor panel. SIP-based audio communication to a monitor is achieved by pressing the mechanical button. This unit can either be flush or surface mounted using the BR-AV2 bracket. Once communication has been established, the indoor monitor can enable the AV02IDE's built-in relay.



SIP · Cloud or Stand-alone · Integrated with Access Control & VMS · PoE · IP65


SPECIFICATIONS:

MAIN FEATURES	
Panel Type	Individual
Degree of Protection	IP55
Temperature Range	-40 - +65 °C
Power Consumption	6.5 W, standby 2.5 W
Power Supply	+12 Volt, PoE
Body	Metal
Color	Gold
Size for Installation	94 x 151 x 60 mm
Size of Panel	99 x 159 x 48 mm
Installation Type	Flush, surface with BR-AV2

FUNCTIONALITY	
Interface	Multi-language graphical and WEB interface
Lock Opening	- By means of a monitor - From the BAS-IP Intercom application
Shortcut Buttons	Mechanical Button
Number of Call Melodies	4 polyphonic melodies
Authentication	Separate password for settings, WEB - interface
Talking Mode	Duplex
Optional	- SIP P2P - Built-in relay

ADDITIONS		Image
Surface Mount	BR-AV2	
Flush Mount Included		

DIMENSIONS: (not to scale)

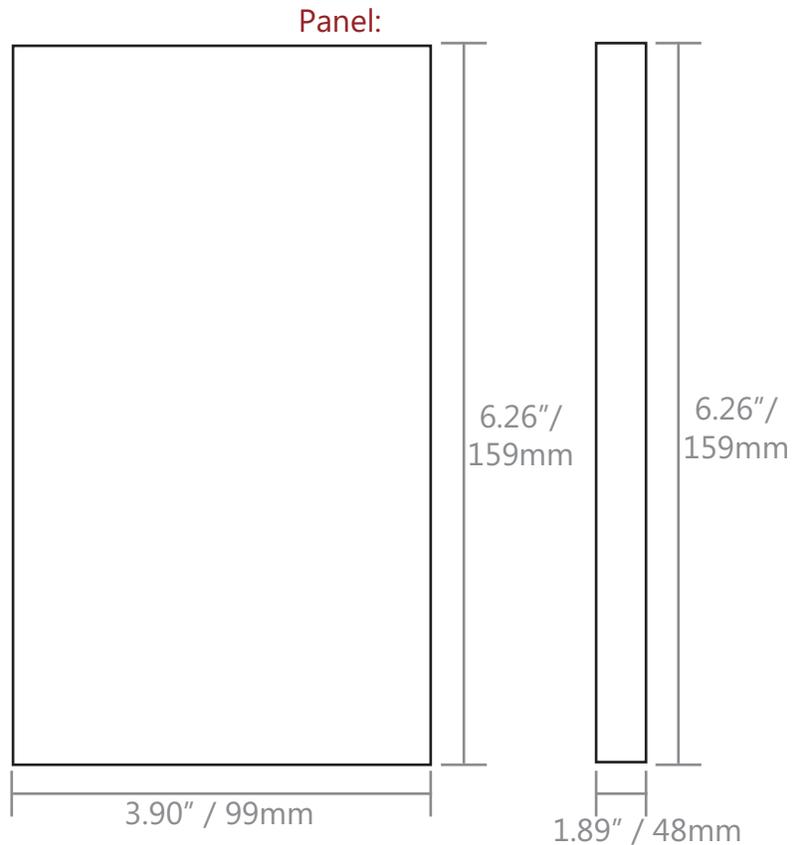

Flush Mount BR-AV2 Dimensions:

