




OUTDOOR PANEL

AA-12FB

ATTRACTIVE, MODERN, & SECURE The AA12 is a vandal resistant outdoor intercom entry system supporting up to 10k entries. The 4" LCD has a scrollable directory listing allowing visitors to quickly find and communicate with intended parties. Visitor calls can be answered on a mobile app, phone, in-suite tablet or routed to a SIP phone system. As an entry station, access can be granted to visitors with our mobile app or by pressing a number on the phone key pad. For residents in the building, entry can be gained by using a card credential or PIN.

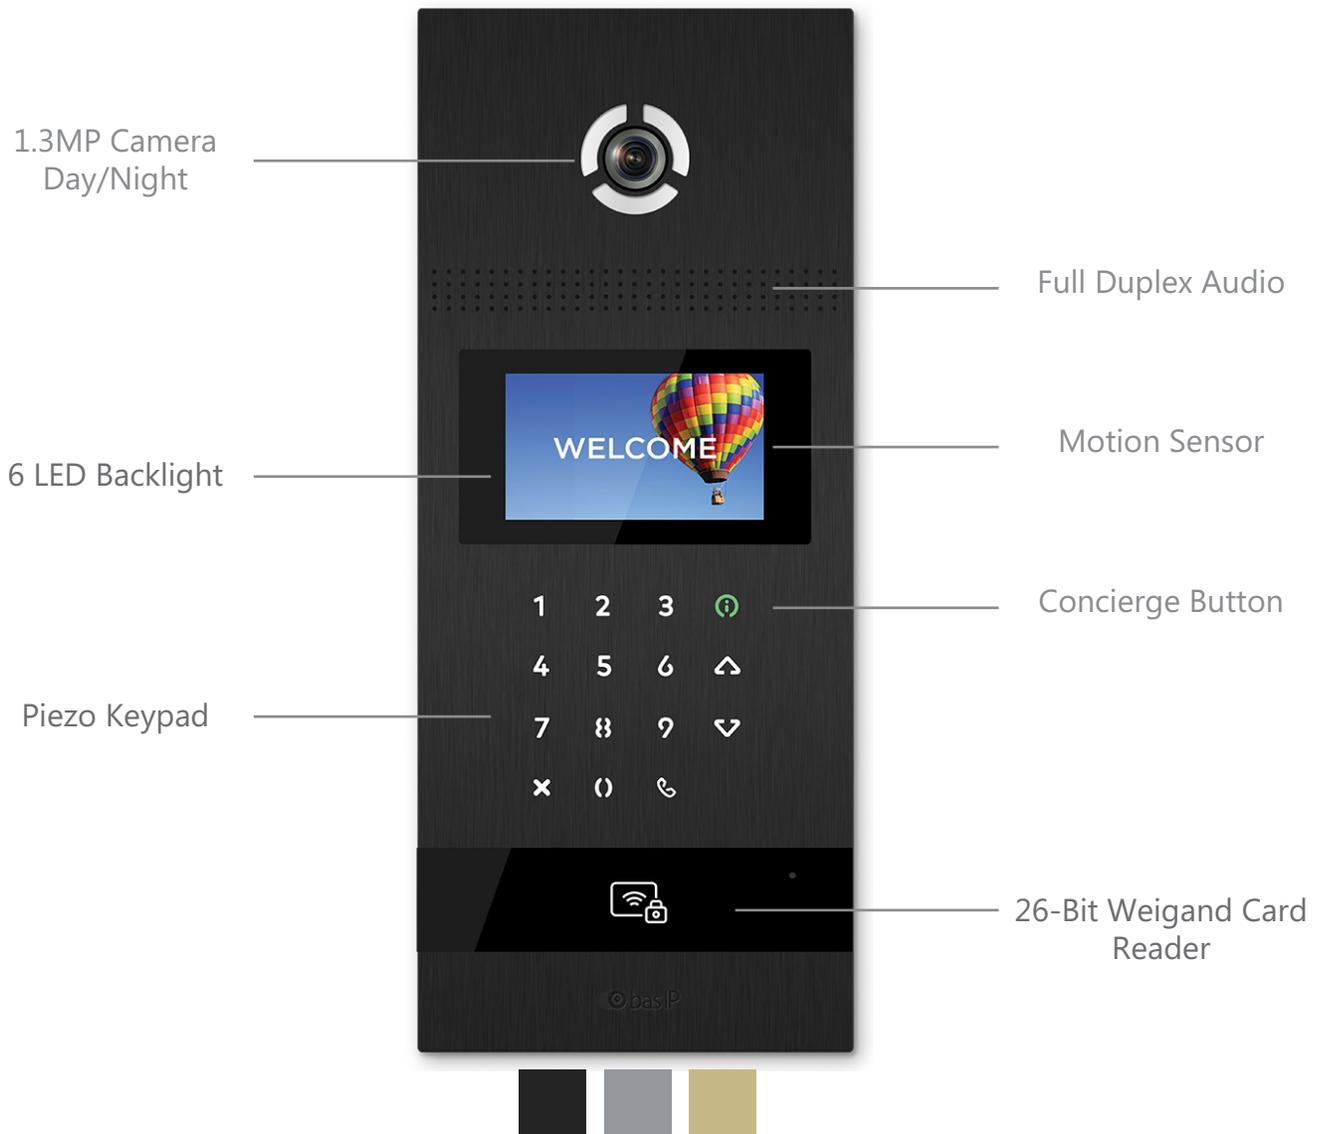

Integrate with Access Control & VMS · Motion Sensor · ONVIF Camera · SIP
 Day/Night · IK7 · IP65 · Directory Listing · Cloud or On-Premise
 Supports up to 10k entries


SPECIFICATIONS:

MAIN FEATURES	
Panel Type	Multi-apartment
Display	4.3" TFT, color with backlight
Keypad	Backlight piezo buttons
Camera	1/4"
Angle	90° horizontal x 62° vertical
Resolution	1.3 Mp.
Output Video	HD (1280 × 720), H.264 Main Profile
Night Backlight	6 LEDs
Light Sensitivity	0.01 Lux
Protection Class	IP65
Working Temperature	-40 – +65 °C
Power Consumption	6,5 W, in standby – 3,6 W
Power Supply	+12 V DC Sold Separately
Body	Aluminum alloy
Colors	Silver, Gold, Black
Dimensions for Installation	141 × 359 × 58 mm
Size of the Panel	158 × 379 × 49 mm.
Installation	Flush, surface with BR-AA12 Bracket

FUNCTIONALITY	
Paging Options	Station to station, group and overhead speaker
Interface	Multi-language graphical and WEB interface
Lock Opening	<ul style="list-style-type: none"> - By means of a monitor - By the code - By an access card - From API
Access Control Integration	WIEGAND-26+ output
Shortcut Buttons	Concierge Button
Number of Call Melodies	4 polyphonic melodies, ability to customize melodies for different actions
Authentication	Separate password for settings, WEB - interface and RTSP stream
Talking Mode	Full Duplex
Additionally	<ul style="list-style-type: none"> - Software Link support - SIP P2P - Built-in relay - Proximity sensor - Open API

ADDITIONS		Image
Surface Mount	BR-AA12	
Flush Mount Included		
supported on legacy 2-wire systems with our SW-series conversion kits	SW-02 SW-08 SW-10	

DIMENSIONS: (not to scale)

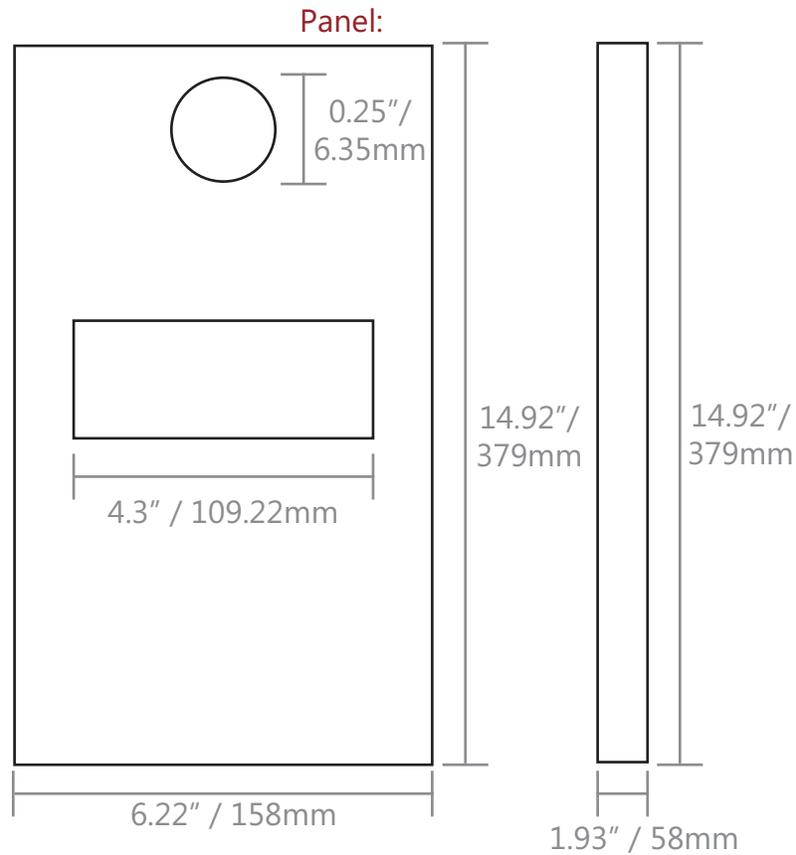

Flush Mount BR-AA12 Dimensions:

